



Government of West Bengal
Office of the Secretary,
District Health & Family Welfare Samiti &
Chief Medical Officer of Health, N 24 Pgs, Kol-124,
Ph. No.2552-3129, E-mail: cmohn24pgs@gmail.com

Memo No: DH&FWS/NHM/ENG-E/2020/NIT-XRY/1/982

Date: 22/06/2020

N.I.T.No. -05/ENG/2nd Call of 2020-2021

Sealed Short tenders are hereby invited by the Secretary, District Health & Family Welfare Samiti & C.M.O.H, Barasat, North 24 Parganas from bonafide, resourceful and responsible contractors / agencies for the Electrical Installation Work in the tender drop box of the undersigned office. The work is mentioned at below-

| Sl. No | Name of Work | Estimated Cost | Earnest Money | Processing fees | Time of Completion (Counted from the date of issuance of Work Order) |
|--------|--|--|---------------|-----------------|---|
| 1 | E.I. Work at proposed X - Ray Unit at Biswanathpur BPHC, Deganga Block, North 24 Parganas. | Rs. 2,82,521.00 (Including 12% GST, 1% L.W.Cess & 3% Contingency) | Rs.5,650/- | Rs.500/- | 21 Working Days |

| Date of publication of 'Tender Notice' | Last date of Dropping of 'Sealed Tenders' | Date of opening of 'Technical Bid' | Date of opening of 'Financial Bid' |
|--|---|--|--|
| 22.06.2020 | 30.06.2020 up to 16:00 hrs. | 01.07.2020 on 12:00 hrs. at CMOH Chamber | 01.07.2020 on 15:00 hrs. at CMOH Chamber |

Terms and Conditions

1. The interested agencies have to collect their all relevant tender document from <http://north24parganas.gov.in> only.
2. All intending bidders must submit their sealed Tender documents in two separate envelopes for Technical and Financial bids, super-scribed with the addressee, NIT No., Job detail & Agency details is to be dropped in the tender drop box kept in the office of the undersigned on scheduled date and time.
3. Bidders have to submit processing fees in form of NEFT of a Nationalized Bank in favor of the **District Health and Family Welfare Samiti North 24 Parganas**, at the account no. **424210100036711, Bank of India, Barasat, IFSC-BKID0004242**.
4. Earnest money against the work @ **2.0%** of the total value of work in form of **Demand Draft** of a Nationalized Bank in favor of the "**District Health and Family Welfare Samiti North 24 Parganas, Payable at Barasat**".
5. **Technical Bid contains** Earnest Money Demand Draft, Processing fee NEFT original challan copy, Self-declaration form (Annexure-B), PAN Card, I.T return of AY- 2019-20, up-to-date payment of Professional Tax challan, GST registration certificate, Valid Trade license (for electrical works) and Bye-Laws for Engineer Co-operative/Labour Co-operative society, Electrical license & Supervisory Certificate of competency in parts 1, 2, 11 & 7a or equivalent National Supervisors Certificate of competency and credential showing satisfactory completion of one work of similar nature in any Govt. Department commencing not older than 5 years from the date of publication of this N.I.T of value **not less than 40%** of the estimated cost put to tender.

N.B. : Completion Certificate should contain a) Name of Work b) Name of Client c) Amount put to tender d) Schedule date of completion e) Actual date of completion f) Date of Payment g) Amount Paid. The certificate shall be issued by the competent authority who issued the 'Work Order' on behalf of the organization.

6. **Financial bid contains** NIT, Estimate and financial bid document paper. The quoted rate should be in percentage basis, both in figures and in words as per **Annexure-A**.
7. As per GO No 4608-F(Y), Dt. 18.07.2018 from Govt. of W.B. Finance Dept.(Audit Branch), the eligible bidder have to submit addition performance security @ 10% of tender amount if the accepted



Government of West Bengal

Office of the Secretary,

District Health & Family Welfare Samiti &
Chief Medical Officer of Health, N 24 Pgs, Kol-124,
Ph. No.2552-3129, E-mail: cmohn24pgs@gmail.com

bid value is 80% or less of the estimate put to tender. The addition performance security shall be submitted in the form of bank guarantee from any nationalized bank within 7 working days from the date of issuance of letter of acceptance, if failed his EMD will be forfeited and other necessary actions like blacklisting of the contractor, etc. may be taken. The bank guarantee will be returned after successful completion of the work. If the bidder fails to complete the work successfully the bank guarantee will be forfeited at any time during the pendency of the contract period after serving proper notice to the contractor.

8. The selected agency have to collect PWD Tender Form No. 2911 from the Engineering section of the undersigned and the same have to be submitted after properly filling-up within 7(Seven) days from the date of receipt of the work order.
9. The authority will not take any responsibility against the amount deposited for earnest money in case of non-submission of bid against the said NIT. In connection with these works, no Arbitration will be allowed.
10. Incomplete tender will be rejected summarily.
11. The work will be executed under the supervision of the engineering section of DPMU. The bidders may collect detail works from the engineering section of DPMU.
12. The offered rate should be inclusive of charges such as royalty & cess, toll charge, carriage, re-carriage, GST etc. No mobilization / secured advance will be allowed.
13. The contractor shall have to carry out work with his own equipment and machinery.
14. The successful tenderer shall have to start the work within **7(seven)** days from the date of receipt of the work order and the work should be completed within the stipulated time failing which the earnest money may be forfeited and work order will be treated as cancelled.
15. Acceptance of lowest tender is not obligatory & the undersigned reserves the right to accept any tender or to reject any or all tenders at any stage without assigning any reason and to split up tender work's to more than one contractor in the interest of speedy execution of the work. The undersigned reserves the right to alter the terms and condition of this notice at any time in the interest of public service.
16. Security deposit @ **Rs.10 (Ten)** % of cost of work will be deducted from each & every bill of the selected agency.
The Total security deposit shall be refunded to the contractor on expiry of **one year** from the actual date of completion of the work. No interest should be given on the earnest money & security money; only the Labour Co-Operative Societies are exempted from paying Earnest Money.
17. The Earnest money deposited will be forfeited by the Secretary, DH & FW Samiti & C.M.O.H, Barasat, North 24 Parganas in case:-
 - (i) The Tenderer withdraws tender after opening or acceptance.
 - (ii) The selected Tenderer fails to accept order, refuses either wholly or partly the offer that would be made by the undersigned.
 - (iii) The selected Tenderer fails to execute their assigned work within the date stipulated in the work order.
18. Schedule of work / supply will be prepared and measured as per approved P.W.D (W.B) schedule of Rates, Effective from November 2017 with all amendments.
19. The undersigned reserves the right to forfeit the Earnest money and security deposited in the event of any short of breach of contract.
20. Contractor should put their firms/organization endorsement (signature of authorized signatory with official stamp) on each page of all the tender documents.
21. Contractors will note that non-compliance of any of the instruction is liable to render there, tender will be non-bona-fide.
22. All kinds of materials and labour related to the job will have to be arranged by the contractor and to be got approved by the engineering section before their use. The contractor at his own cost shall remove the rejected materials/ workmanship from site within 24 hours.
23. The contractors at his cost shall store all the materials which will be used for the work.
24. If the Engineer in charge/Authorized Officer of employer finds that the works delayed by reason beyond the control of the contractor, the Engineer in Charge / Authorized Officer after subjecting



Government of West Bengal
Office of the Secretary,
District Health & Family Welfare Samiti &
Chief Medical Officer of Health, N 24 Pgs, Kol-124,
Ph. No.2552-3129, E-mail: cmohn24pgs@gmail.com

the approval of CMOH will make a fair and reasonable extension of time for completion of contract with written approval.

25. The payment of the agency will be released after issuance of work-done satisfactory received from the concerned authority.
26. Contractor have taken requisite "All Risk Insurance Policies" to cover workman under Workman Compensation Act, loss / damage caused by natural calamities / accident /accidental collapse of partially completed work, materials and plant at site and for third party claims for injury / damages.
27. Before taking initiation of any extra item/excess quantity during the work, the same should be got approved by Engineer in charge/Authorized Officer. Payment should be made as per PWD schedule of rate effected from November, 2017 but any extra demand from the work order amount as per tender will not be entertained.
28. Due to work at Hospital the Contractors / agencies will be responsible for work at emergency basis and urgently finishing the work. All materials must be P.W.D. schedule specified, Engineer in charge may ask for test certificates for quality control. The agency/contractor must be carrying the cost of the said test without any claim.

Am
22/6/2020

Secretary
District Health & Family Welfare Samiti &
Chief Medical Officer of Health
North 24 Parganas

Memo No. DH&FWS/NHM/ENG-E/2020/NIT-XRY/1/982/1(13)

Date: 22/06/2020

Copy forwarded for kind information and necessary action regarding vast publication to:

1. The District Magistrate, North 24 Parganas.
2. The PO, NHM & Deputy Secretary, H&FWS, Govt. of W.B.
3. The Officer - In -Charge of Health, N24 Pgs.
4. The Executive Engineer of North 24 Parganas Electrical Division., P.W.D.te.
5. The Dy. CMOH-I, Nodal Officer, North 24 Pgs.
6. The Dy. CMOH-II/ Dy. CMOH-III/ NUHM NODAL/DMCHO/DTO, N24 Pgs.
7. The ACMOH of Barasat/ Barrackpore/ Bongaon Sub-Division, N24Pgs.
8. The BMOH of Deganga Block, N24Pgs.
9. The Account Officer & Treasurer of CMOH office, N24Pgs.
10. The Admin. Officer, CMOH office, N24Pgs.DPMU-NHM 0/0: CMOH & DH&FWS, N24Pgs.
11. The N.I.C, North 24 Parganas. **(Requested to upload this notice in the official website of North 24 Parganas District.)**
12. Notice Board.
13. Office Copy.

Am
22/6/2020

Secretary
District Health & Family Welfare Samiti &
Chief Medical Officer of Health
North 24 Parganas

sdh
 Secretary
 District Health & Family Welfare Samit
 & Chief Medical Officer of Health
 North 24 Parganas

Financial Bid Document

Name of Agency:

Address:.....

N.I.T No.....of 20....- 20....Vide Memo No:

Work Sl. No:

Description of Work:

Estimated value put to Tender (Rs.):

Earnest Money Deposit value (Rs.):

Earnest Money Deposit NEFT detail:

Quoted Percentage (both in figure and word) if any, to be deducted from bill:

(Seal & Signature)


Full Name & Address of the Contractor:

Phone No.:

Sd/-
Secretary
District Health & Family Welfare Samit
& Chief Medical Officer of Health
North 24 Parganas

Self-Declaration

Space for Photograph

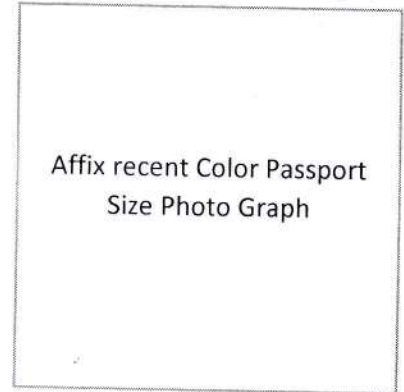

Affix recent Color Passport
Size Photo Graph

I.....son/daughter of Shri.....
age.....years, resident of..... in the district.....
of, West Bengal, do hereby declare that the information given above and in
the enclosed documents is true to the best of my knowledge and belief and
nothing has been concealed therein. I am well aware of the fact that if the
information given by me is proved false/ not true at any point of time, I will
have to face punishment as per any provision of Law for the time being in
force as well as the benefit availed of by me or the benefit accrued to me shall
be summarily canceled.

Date:

Signature of Applicant

Place:

| Name of Work:- | E.I. Work at proposed X - Ray Unit at Biswanathpur BPHC, Deganga Block, North 24 Parganas. | | | | |
|----------------|--|------|------|-----------|-------------|
| Ref: | As pe site inspection carried out on 13.11.2019 and Checklist provided from H&FW Department. | | | | |
| Report | As per site inspection it has been observed that proposed site needs E.I. work including S&F of light/fan/Power Porints and with necessary distribution wiring. Also separtae Line from panel, main switch, Starter, S&F of AC machine with voltage stabilizer, Copper earthing dedicated for CR system to decrease the neutral earth voltage & normal separate earthing for x ray machine are incorporated in this estimate. Hence the following estimate has been framed to meet up the probable cost for the proposed work and submitted for final approval & financial sanction. | | | | |
| Sl. No. | Description of Item | Unit | Qty. | Rate.(Rs) | Amount.(Rs) |
| 1 | Supplying and fixing 415V, 100 A TPN SFU with sheet steel enclosure on angle iron frame on wall with nuts bolts etc incl. S & F 3 nos. DIN type HRC fuse as per rating. (Make- L&T/ Siemens [Pg-D3 Item- 4(a)]) | Each | 2 | 7,245.00 | 14,490.00 |
| 2 | Supplying and fixing 415V, FP 125A on load front operated Changeover switch with Sheet Steel enclosure on angle iron frame on wall with nuts bolts etc (Make- L&t) | Each | 1 | 8,568.00 | 8,568.00 |
| 3 | Supply & Delivery of cable from 4 core 35 sqmm Alu/Arm cable (Make- Gloster) on wall/surface incl. S & F MS saddles with earthing attachment in 10 SWG GI (Hot Dip) Wire, making holes etc. as necy. mending good damages and painting [Pg-F1 Item- 2] | Mtr. | 100 | 288.31 | 28,830.70 |
| 4 | S&F compression type gland complete with brass gland, brass ring & rubber ring for dust & moisture-proof entry of XLPE/PVC armoured cables. Incl Finishing the end of following XLPE/PVC armoured cables by crimping method incl. supplying and fixing solderless socket (Dowels make), tapes, anticorrosive paste & jointing materials as below : [Pg-F4 Item- 7/c & F5 Item 8/h] upto 4 core 35 sqmm | Set | 6 | 320.00 | 1,920.00 |
| 5 | Supply & Fixing of 3Ph 415 V, 45HP or 33KW Dol Starter (Relay range- 45-70A) in sheet steel enclosure with necessary nuts & bolts etc. (Make- L&T, Model - MN 65 DOL) | Each | 1 | 18210.00 | 18,210.00 |
| 6 | Supply & delivery 1.5 Ton split type A. C. machine consisting of copper condensing and cooling & other accessories. [Make- Mitsubishi, Star Rating - 5, Model- MSZ/MUZ HP18V [R-410A]/o General Star rating -5 Model No ASGA18FETA, R-410A./ Hitachi I Connect-] | Each | 1 | 71400.00 | 71,400.00 |
| 7 | Installation Charges of the 1.5/2 TR capacity split type a.c. machine incl. S&F of MS bracket making holes, extra copper pipe etc. and mending good the damages. (For AC) | Set | 1 | 2215.00 | 2,215.00 |
| 8 | S/F refrigeration copper pipe (5/8" & 1/4") with insulation foam, electric cable (3 core 4 sq. mm PVC Copper wire) PVC hard drain pipe, 4 core Control cable 2.5 sq mm. (For AC) | Mtr. | 20 | 556.00 | 11,120.00 |
| 9 | S&F Voltage Stabilizer for 1.5 ton AC, Input range (130V- 270V), Output Voltage (200V- 240V ± 2%), Current - 12A, 4KVA, DL- 4 (Make- Sen & Pandit) on wall with nutss & Bolts. | Each | 1 | 5000.00 | 5,000.00 |
| 9 | Supply & Fixing 240 V, 25 A, Modular type starter (Brand approved by EIC) with 25A Modular switch type DP MCB (CCurve) and 4 Module GI Modular type switch board with 4 Module top cover plate flushed in wall incl. S&F switch board and cover plate and making necy. connections with PVC Cu wire and earth continuity wire etc. [Pg-E19 Item- 17] | Each | 1 | 784.00 | 784.00 |
| 10 | Supply & Fixing 240 V, 25 A, 3 pin Modular type plug socket (Brand approved by EIC), without plug top and switch with 2 Module GI Modular type switch board with top cover plate flushed in wall and making necy. connections with PVC Cu wire and earth continuity wire etc.. [Pg- E17 Item- 5/a] | Each | 1 | 353.00 | 353.00 |
| 11 | Distribution wiring in 1.1 KV single core stranded 'FR' PVC insulated & unsheathed copper wire (Make- Finolex/ Havells) in 20mm size PVC rigid conduit 'FR' (Precision make) incl. necy. fittings as required [Pg- E14, Item- 1/a/ii] | | | | |
| | a) 2 x 84/0.3 (6 sqmm) + 1 x 56/0.3 (4 sqmm) ECC [for PDB to Socket & Socket to SPN DB] | Mtr. | 40 | 193.00 | 7,720.00 |
| | b) 2 x 56/0.3 (4 sqmm) + 1 x 36/0.3 (2.5 sqmm) ECC [for PDB to AC] | Mtr. | 30 | 149.00 | 4,470.00 |
| | c) 2 x 36/0.3 (2.5 sqmm) + 1 x 22/0.3 (1.5 sqmm) ECC [for SPN DBto PP, Comp. Point] | RM | 30 | 119.00 | 3,570.00 |
| 12 | Supplying and fixing double-door 2+8 way SPN MCB Distribution Board with IP-42/43 protection, concealed in wall after cutting the wall & mending good the damages to original finish incl. Inter connection with suitable size of copper wire and neutral link & provision for earthing attachment. (Make- L&T/ Siemens) [Pg- D10, Item- 13] Incomer: DP 40A Isolator- 1 No. [Pg- D5, Item- 6] Outgoing: SP 6-32A 10KA C- Curve MCB- 6Nos. [Pg- D6, Item- 7] | Each | 1 | 3,005.00 | 3,005.00 |

| Sl. No. | Description of Item | Unit | Qty. | Rate.(Rs) | Amount.(Rs) |
|---------|--|------|------|-----------|-------------|
| 13 | Distribution wiring in 1.1 KV grade 2x22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire (Make- Finolex/ Havells) partly in 20mm size PVC rigid conduit 'FR' (Precision make) [for ceiling portion only] and in 19mm bore, 3mm thick polythene pipe [for horizontal & vertical run embedded in wall], with 1x22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire for ECC, to light/fan/call bell points with Piano Key type switch fixed on MS CRC sheet metal (16 SWG) switch board on wall complete with 2 no. "Ph & N" copper bar incl. bakelite/ Perspex top cover 3 mm thick and incl. 175x100x65mm inspection box, making earthing attachment, painting the MS box and mending good the damages to original finish [only PVC Rigid Conduit on ceiling and remaining portion concealed] Avg RM: 8 Mtr [Pg- E15, Item- 5] | Each | 15 | 992.00 | 14,880.00 |
| 14 | Distribution wiring in 1.1 KV grade 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire (Make- Finolex/ Havells) in 20mm size PVC rigid conduit 'FR' (Precision make), with 1.1 KV grade 1 x 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire as ECC, to 5A 3 pin flush type plug socket & Piano Key type switch fixed on MS CRC sheet metal (16 SWG) switch board cum JB on wall incl. bakelite/Perspex (wall matching color) top cover 3 mm thick and incl. painting the MS box and mending good the damages to original finish On Board [Pg- E15, Item- 4] | Each | 2 | 67.00 | 134.00 |
| 15 | Supply & Fixing 240 V, 3 nos. 6A, & 1 no. 20A plug socket with separate 3 nos. 6 A & 1 no. 20A Piano key type switch with indicator & 16A kit-kat flush type fuse (Anchor) on sheet metal switch board embedded in wall incl. S & F 240x200x65mm MS (16SWG) switch board and bakelite/perspex top cover of 3mm thick by Brass screws after making housing for switch by cutting bakelite/perspex cover and making necessary connections as required [Pg- E7, Item- 25] [For Computer] | Each | 1 | 663.00 | 663.00 |
| 16 | Supply & Fixing 240 V, 20A, plug socket with separate 20 A Piano key type switch (Anchor) on sheet metal switch board embedded in wall incl. S & F 150x100x65mm MS (16SWG) switch board and bakelite/perspex top cover of 3mm thick by Brass screws after making housing for switch by cutting bakelite/perspex cover and making necessary connections as required [Pg- E6, Item- 22] [Power Socket] | Each | 7 | 287.00 | 2,009.00 |
| 17 | Supplying & Fixing Industrial Plug & Socket board with 240 V, 20A, SPN & Earth Metal Industrial Plug socket & 20A Industrial top incl. S&F 20 A SP MCB breaking capacity 10kA (C- Curve) in SS enclosure fixed on wall and necessary connection [Pg- D12, Item- 17] | Each | 2 | 904.00 | 1,808.00 |
| 18 | S&Fixing Single LED tube light fittings (Cat No- TMC501P 1XT- LED 22 W P3241) with 1 no. LED lamp (MAS LEDtube 1200mm 18W865 T8 I – 2100lm) with 'L' type MS clamp & 2 nos. dia EI conduit as per GS. (Make- Philips) | Each | 4 | 1314.88 | 5,259.52 |
| 19 | S&Fixing Double LED tube light fittings (Cat No- TMC501P 2XT- LED 22 W P3241) with 2 no. LED lamp (MAS LEDtube 1200mm 18W865 T8 I – 2100lm) with 'L' type MS clamp & 2 nos. dia EI conduit as per GS. (Make- Philips) | Each | 2 | 1986.88 | 3,973.76 |
| 20 | S&F of 9 Watt, 240V pin type LED bulb on wall incl. Supply & Fixing angular batten holder (Anchor) on 75mm dia PVC round block / round bakelite on wall/ceiling(Make- Philips) | Each | 4 | 170.00 | 680.00 |
| 21 | Supply & fixing of 48" (1200 mm sweep) 240V AC ceiling fan complete with down rod, blades, canopy etc. incl. other accessories. (Make- Crompton Greaves Aura/ Orient Quasar Ornamental Shine-Antidust) | Each | 4 | 2263.00 | 9,052.00 |
| 22 | Supply & Fixing Socket type fan regulator (Step type) (Make- Anchor) on existing sheet metal switch board with bakelite/perspex top cover by screw after making housing for regulator knob by cutting bakelite/perspex top cover incl. making necy. connections etc [Pg- E6, Item- 18/a] | Each | 4 | 236.00 | 944.00 |
| 23 | Supply & fixing of 400 mm sweep 240V AC wall fan complete with necessary accessories and connection as required. (Make - Crompton windflow / Orient Wall 45) | Each | 1 | 2390.00 | 2,390.00 |
| 24 | Supplying & Fixing MS fan clam of two piece type for RC ceiling as per approved specification, fabricated from 40 mm x 9 mm MS flat including making good damages to building roof with satisfactory finishing and painting – (As per Drawing no. 475 of PWD Specification Book – May 1991) [Pg- D14, Item- 29] | Each | 2 | 242.00 | 484.00 |
| 25 | Earthing with 50 mm dia GI pipe 3.64 mm thick x 3.04 Mts. long and 1 x 4 SWG GI (Hot Dip) wire (4 Mts. long), 13 mm dia x 80 mm long GI bolts, double nuts, double washers incl. S & F 15 mm dia GI pipe protection (1 Mts. long) to be filled with bitumen partly under the ground level and partly above ground level driven to an average depth of 3.65 Mts. below the ground level as below: By TATA-Medium GI pipe (For Xray Eqpt.) [Pg-G- 1, Item- 2] | Each | 2 | 1,524.00 | 3,048.00 |

| Sl. No. | Description of Item | Unit | Qty. | Rate.(Rs) | Amount.(Rs) |
|---|---|---------|------|--------------------------|-------------------|
| 26 | Connecting the equipments body to earth busbar including S & F 25 mm x 6 mm galvanised (Hot Dip) MS flat on wall/floor with GI saddles as required and connection to equipments incl. drilling holes, with bolts, nuts, washers etc. [Pg- G3 Item- d] (For Xray Eqpt.) | Mtr. | 7 | 138.00 | 966.00 |
| 27 | Supplying & fixing earth busbar of galvanized (Hot Dip) MS flat 25 mm x 6 mm on wall having clearance of 6 mm from wall including providing drilled holes on the busbar complete with GI bolts, nuts, washers, spacing insulators etc. as required [Pg- G2 Item- 4/b] (For Xray Eqpt.) | Mtr. | 1 | 156.00 | 156.00 |
| 28 | Earthing with Copper plate (610x610x3mm size) having weight of 9.84 Kg and 1 No. 25x5mm Copper strip (3.20 mt long) & 1 no. 6 sqmm PVC insulated stranded Copper wire (4 Mt long) incl. S & F 15 mm dia GI pipe (ISI-Medium) protection (4 mt. long) to be filled with bitumen, partly under the ground level & partly above ground level to an average depth of 3.65 Mts. below the ground level and restoring the surface duly rammed incl. providing 3.0 mt long, 25 mm dia GI pipe (ISI-Medium) for periodic treatment, incl. providing masonry enclosure on the top of the earth electrode of overall size 86.36x86.36x46cm deep (below Ground level) complete with cemented brick work (1:6) of 25 cm width, duly plastered with cement mortar (inside) CI hinged inspection cover of size 36.56x35.56cm with locking arrangement, GI reducer and treatment of soil by using salt & charcoal or coke for plate electrode [Pg- G3 Item- 7] | Set | 1 | 10,466.00 | 10,466.00 |
| 29 | Extra for treatment of soil by using salt & charcoal or coke for plate electrode [Pg- G2 Item- 3/b] | Item | 1 | 531.00 | 531.00 |
| 30 | Supplying and Drawing 1.1 KV single core stranded 'FR' PVC insulated & unsheathed single core stranded copper wire (Make- Finolex/ Havells) of the following sizes in in 20mm size PVC rigid conduit 'FR' (Precision make) incl. necy. fittings as required [1 x 84/0.3 (6 sqmm)] [from Earth Electrode to Earth Busbar] | Mtr. | 10 | 157.00 | 1,570.00 |
| 31 | Earth Continuity Conductor: Connecting the equipments to earth busbar including S & F GI (Hot Dip) wire of size as below on wall/floor with staples buried inside wall/floor as required and making connection to equipments with bolts, nuts, washers, cable lugs etc. as required and mending good damages Solid GI wire No. 8 SWG [Pg- G2 Item- 5] | Mtr. | 25 | 9.00 | 225.00 |
| 33 | Supply & fixing of LED Glow Sign Board (2'x1'x6") with G.I. Box & front part of ACP GI sheet - 22 Gauge | Lum Sum | 2 | 10000.00 | 20,000.00 |
| 32 | Dismantling of existing damage main switchs, DBs, light fittings, fans, socket, switch | Job | 1 | 750.00 | 750.00 |
| | | | | Rs. | 261,644.98 |
| Addl GST (@ 12%) except for Sl No. 3,5,6,7,8, 9, 18, 19, 20, 21, 23, 32, 33 | | | | | 9,931.68 |
| | | | | | 271,576.66 |
| Addl. L.W. Cess (+ 1%) | | | | | 2,715.77 |
| | | | | | 274,292.43 |
| Addl. Contg (+ 3%) | | | | | 8,228.77 |
| | | | | | 282,521.20 |
| | | | | Say Total.....Rs. | 282,521.00 |
| Rupees Two Lakh Eighty Two Thousand Five Hundred Twenty One Only | | | | | |

SAE
27/11/19
SAE (Elec), DPMU
NHM, DH & FWS, 24 PGS. (N)

SAE
28/11/19
AE, DPMU
NHM, DH & FWS, 24 PGS. (N)

SAE
11.12.2019
Secretary
District Health & Family Welfare Samit
& Chief Medical Officer of Health
North 24 Parganas